

Laboratory HPGe Detector with Lead Shield

(Liquid Nitrogen cooled)

Application

Radionuclide monitoring of environmental objects (solid, powder, liquid), medicine and biological objects, materials and food.

Features

- Available in Vertical and U-type cryostat
- Adopting precision gamma-spectrometry methods
- Radionuclide identification and determination of their specific activity
- Low instrumental background
- Low threshold for radionuclide detection
- Separate and simultaneous measurement of activity of 100 radionuclides
- Several grades of instrument material (Al, Cu, etc.) radiopurity are available (ref. p. 59):
 - Standard
 - Low-background
 - Ultra low-background

Complete set (standard)

- HPGe coaxial detector
- Preamplifier with cooled input stage
- Dewar vessel
- Lead Shield with a supporting table
- Liquid nitrogen sensor and level monitor
- Cable set
- Documentation

Accessories (optional)

- Multichannel Analyzer (Digital or Analog-Digital)
- Analytical Software packages:
 - quantitative and qualitative analysis
 - γ -spectra modeling & efficiency registration calculation for complex geometry objects
 - extended radionuclide library
- Liquid nitrogen storage and filling system
- Electrically driven lead door
- Cable set extension

Baltic Scientific Instruments
 Ramulu str. 3
 Riga, LV - 1005
 Latvia



Phone: (+371) 67383947
 Fax: (+371) 67382620
 Email: sales@bsi.lv
 www.bsi.lv

Specification

Parameter	Standard	Low background	Ultra low background
Detection limit for ^{137}Cs radionuclide specific activity, 30%* efficiency detector, measurement time 1 hour, Bq/kg	0.7	0.3	0.1
Absolute sensitivity to gamma flux for 30%* efficiency detector, pulse/quantum	4.5×10^{-3}	4.5×10^{-3}	4.5×10^{-3}
Instrumental background intensity for energy range from 40 keV to 3 MeV, pulse x s	< 4.5	< 1.5	< 0.5
^{137}Cs radionuclide specific activity measurement error for 1 hour measurement time, %	< 20	< 20	< 20
Shield thickness			
Lead wall, mm	100	100	100 - 150
Copper wall, mm	6	9	6 - 10
AC power supply			
Voltage, V	230	230	230
Frequency, Hz	50	50	50
Lead Shield internal diameter (without liners)**, mm	200	200	200
Lead Shield internal height (without liners)**, mm	280	280	280
Detector with Lead Shield weight, kg	760	760	> 760

* Detectors with higher efficiency are available
 ** Possible to order other Lead Shield dimensions

Purge port is available for your lead chamber to decrease influence of Radon while measuring

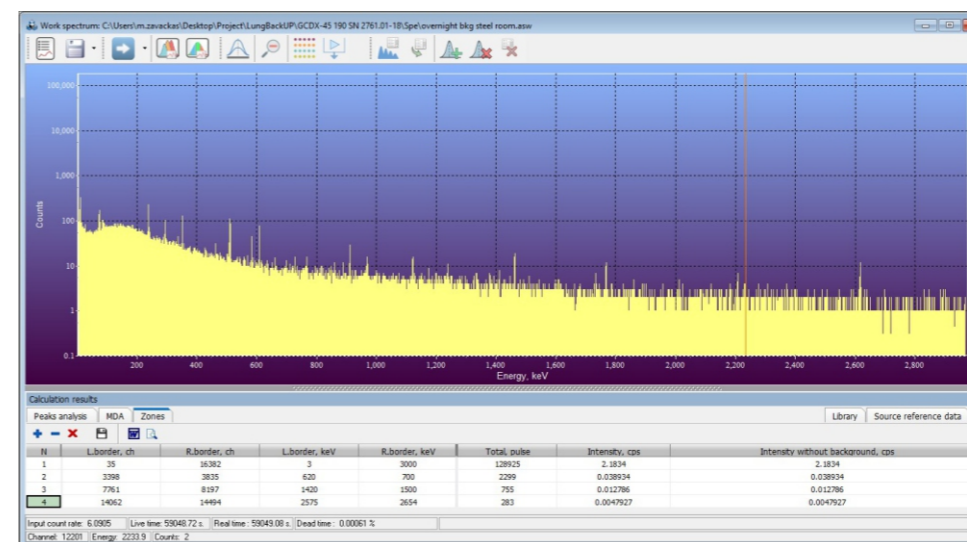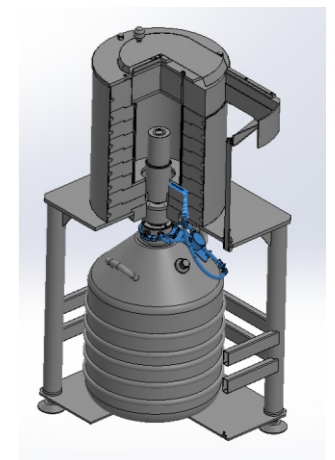

LN₂ Monitor

Th-232, Cs-137, K-40